




TS

CLEANING MACHINE FOR ROUGH PRODUCT

This cleaner removes in a short time the rough material present in cereals. The machine is used before a cleaning plant or in ports or railway stations.

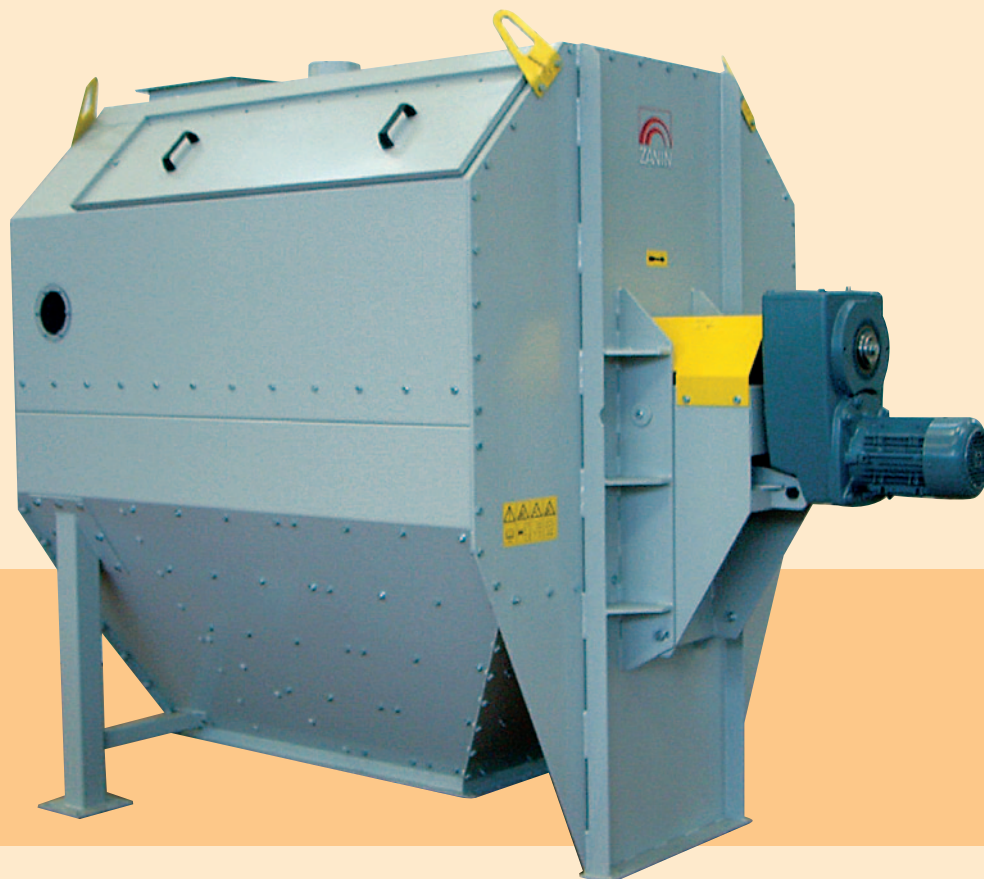

CONSTRUCTION

- Cowling and drum support uprights in pressed galvanised thick sheet
- Mobile frontal door with nuts and bolts
- Painted carbon steel plate screens
- Nylon brushes for screen cleaning
- Extraction screw
- Aspiration intake




01, 02 - Drum detail

FUNCTION

The product enters by gravity into a cylindrical rotary drum into a fix screen. The good product pass through the screen and the big impurities go out on the end

of drum. The choice of screen has to be taken in consideration of product

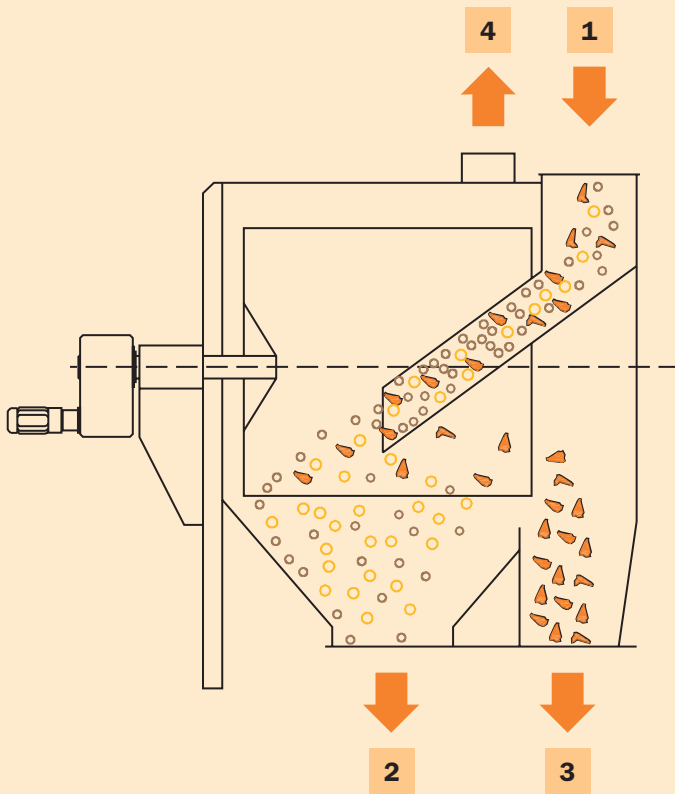

- 1 Product with impurities inlet
- 2 Good product outlet
- 3 Big impurities outlet
- 4 Dust outlet (aspiration intakes)

MODEL	TS 90	TS 120
Output - t/h**	100-200	200-300
Motor power - kW	2,2	3
Length - mm*	2680	2680
Width - mm*	1500	1500
Height - mm*	2150	2150
Weight empty - kg	950	1300
Weight full - kg	1250	1600
Volume - m ³	8,6	8,6

* Overall dimensions

** Cleaning output with wheat S.W. 0.78 - 14% r.h., rejects 2%

OPTIONAL

- Wooden rollers for screen cleaning
- Wearproof polyethylene sheet
- Anti deflagration door
- Electrical panel